




NAMIOT STELAŻOWY Z SERII PINNACLE

Namioty serii Pinnacle zostały zaprojektowane z wysokim, centralnym masztem, stabilizowanym za pomocą krzyżujących się lin rozciągniętych do każdego z narożników, co maksymalizuje przestrzeń użytkową wewnątrz namiotu, eliminując jednocześnie konieczność stosowania dodatkowych słupów czy ram wsporczych. Prosta konstrukcja umożliwia łatwy transport, przechowywanie i montaż. Do rozstawienia namiotu wystarczy zaledwie dwie osoby, a liczba elementów została ograniczona w porównaniu do innych namiotów ramowych lub masztowych.


Minimalna liczba elementów • Szybki montaż • Dostępny nadruk na zamówienie



5373 State Route 29, Celina, Ohio 45822-9210 • Sales@Celina.com
Celina.com • Youtube.com/CelinaTent • 419-586-3610 • 1-866-GET-TENT

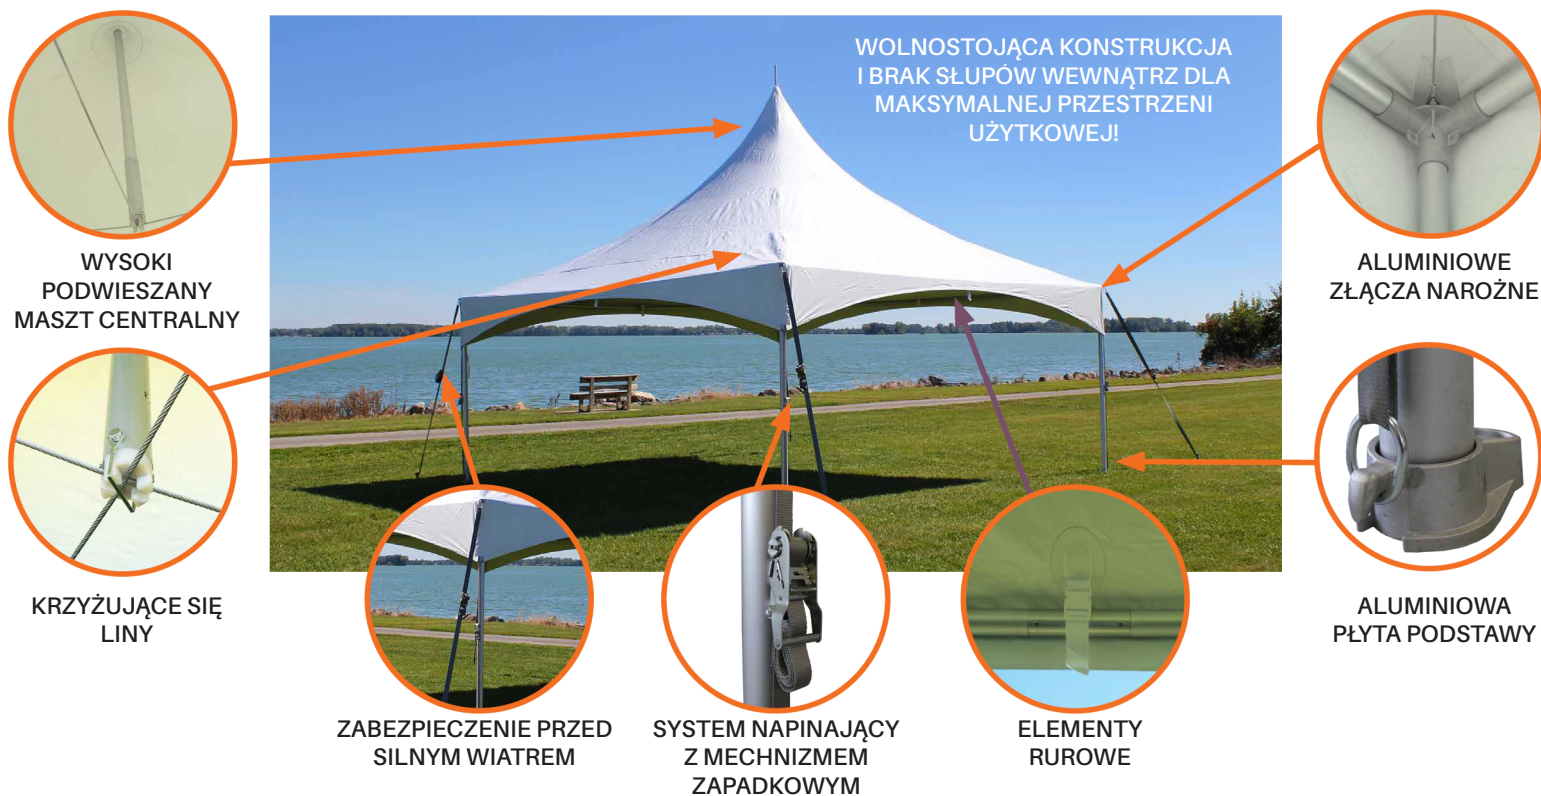


Przegląd komponentów:

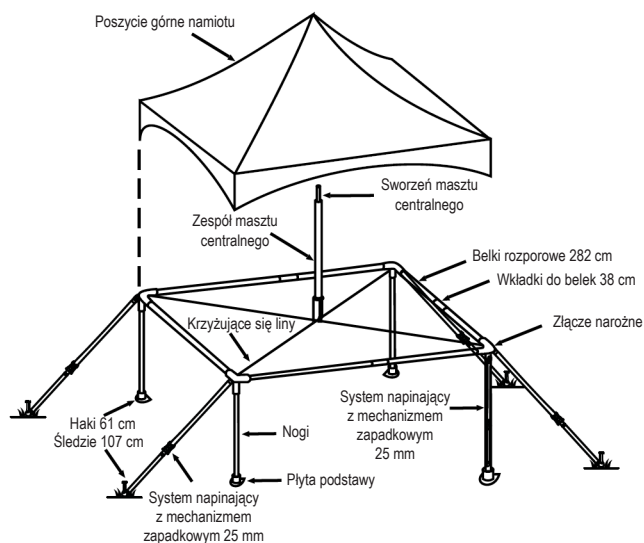

Ogólna konfiguracja stelażu na przykładzie modelu 6 m x 6 m

Konstrukcja namiotu:

- Winyłowe poszycie o gramaturze 540 g/m², nieprzepuszczające światła, trudnopalne oraz odporne na pleśń i grzyby
- Wszystkie panele łączone metodą zgrzewania na zakładkę o szerokości 25,4 mm
- Rama z anodowanego aluminium 6061-T6 o wysokiej wytrzymałości, rury o średnicy 63,5 mm i grubości ścianki 3,17 mm
- Odlewane aluminiowe złącza narożne i płyty podstawy
- 95% poszycia górnego łączone metodą zgrzewania termicznego
- Dostępne wersje ścian bocznych – z oknami lub pełne

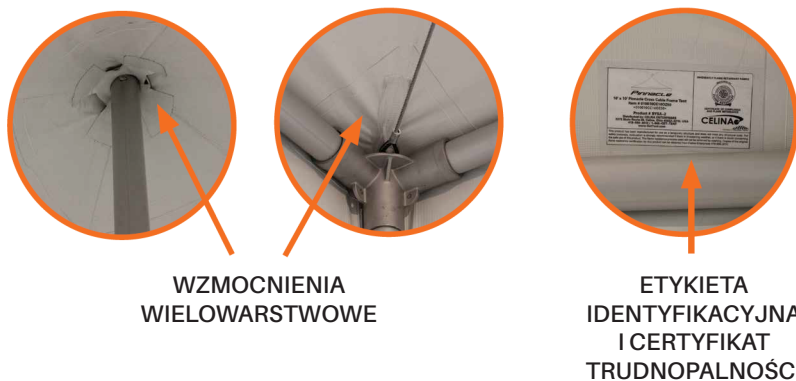



PINNACLE SERIES FRAME TENT

Pinnacle Tents are designed with a high peak center mast supported by cross cables extending from each corner fitting, maximizing the usable space underneath while at the same time eliminating the need for interior frames or support poles. The simple design allows for easy transportation, storage, and installation involving only two people due to the reduced amount of hardware in comparison to other frame or pole tents.

Minimal Hardware



Fast Installation




Custom Printing Available



5373 State Route 29, Celina, Ohio 45822-9210 • Sales@Celina.com
Celina.com • Youtube.com/CelinaTent • 419-586-3610 • 1-866-GET-TENT




Component Overview:

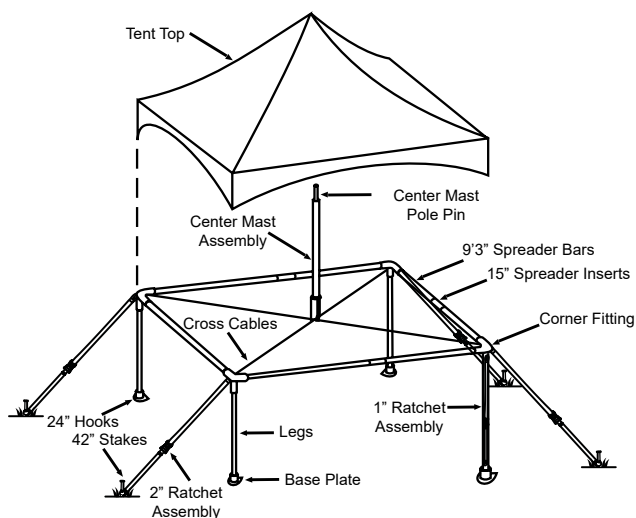

General frame construction shown on a 20' x 20'

Tent Construction:

- 16 oz (540 gsm) blockout, flame resistant, mold and mildew resistant vinyl
- All panels are bonded with 1" (25.4 mm) heat sealed overlapped seams
- 2 1/2" (63.5 mm) dia., 1/8" (3.17 mm) wall thickness, heavy-duty anodized aluminum (6061-T6 aluminum) frame
- Cast aluminum corner fittings & base plates
- 95% of tent top is bonded with heat sealed construction
- Window and solid sidewall options

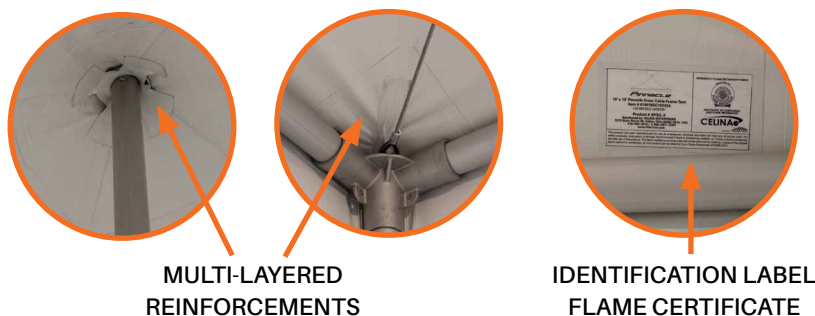



PINNACLE SERIES FRAME TENT

Pinnacle Tents are designed with a high peak center mast supported by cross cables extending from each corner fitting, maximizing the usable space underneath while at the same time eliminating the need for interior frames or support poles. The simple design allows for easy transportation, storage, and installation involving only two people due to the reduced amount of hardware in comparison to other frame or pole tents.

Minimal Hardware



Fast Installation




Custom Printing Available



5373 State Route 29, Celina, Ohio 45822-9210 • Sales@Celina.com
Celina.com • Youtube.com/CelinaTent • 419-586-3610 • 1-866-GET-TENT



Component Overview:

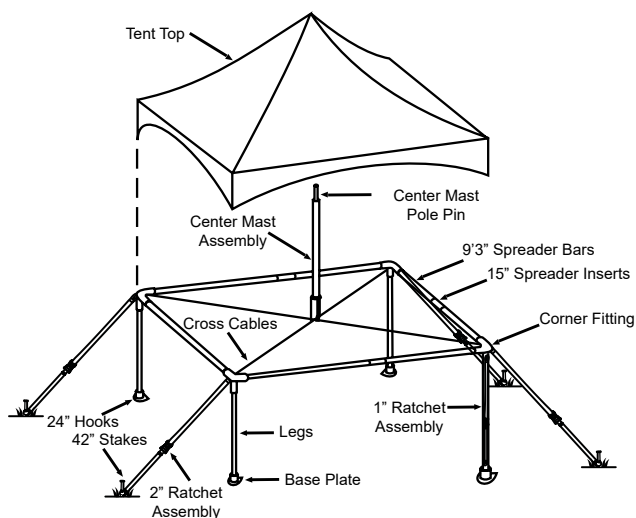

General frame construction shown on a 20' x 20'

Tent Construction:

- 16 oz (540 gsm) blockout, flame resistant, mold and mildew resistant vinyl
- All panels are bonded with 1" (25.4 mm) heat sealed overlapped seams
- 2 1/2" (63.5 mm) dia., 1/8" (3.17 mm) wall thickness, heavy-duty anodized aluminum (6061-T6 aluminum) frame
- Cast aluminum corner fittings & base plates
- 95% of tent top is bonded with heat sealed construction
- Window and solid sidewall options

